

Ceramic Capacitor (THT & SMD)

CT4 Radial Multilayer Ceramic Capacitors
CT42 Axial Lead Multilayer Ceramic Capacitors

	NPO	X7R	Y5V	CT4 Radial Ledded  CT42 Axial Ledded 
Temperature:	-55°C~+125°C	-55°C~+125°C	-25°C~+85°C	
Tolerance:	±5%	±10%	±20%	
Capacitanite:	0.5pF~100uF			
Voltage Range:	50V 63V 100V 200V 500V 1KV 2KV.			
Pitch Size:	2.54mm, 5.08mm, Axial lead			
Chip Size:	0603, 0805, 1206, 1210 Chip Inside			
Shape:	a, b, C1, C2, C3 Shape; axial lead			
Package Type:	Bulk, Ammo Taped, T&R.			
Cross Reference:	Murata RPE series, AVX Skycap SR Series			
Certifications:	ISO 9001: 2015;RoHS ; REACH			

CT41: Chip Multilayer Ceramic Capacitors (Standard Chip MLCC)

Dielectric:	NPO	X7R	Y5V	X5R	
Capacitance:	0.1pF-0.1uF	100pF-47uF	0.01uF-100uF	100pF-220uF	
Tolerance:	±0.25pF; ±0.5pF; ±2%; +/-5%; ±10%; ±20%				
Voltage:	6.3V ~6KV				
Case Size:	0201, 0402, 0603, 0805, 1206, 1210, 1812, 2220.				
Certifications:	ISO 9001: 2015; RoHS 2; REACH				

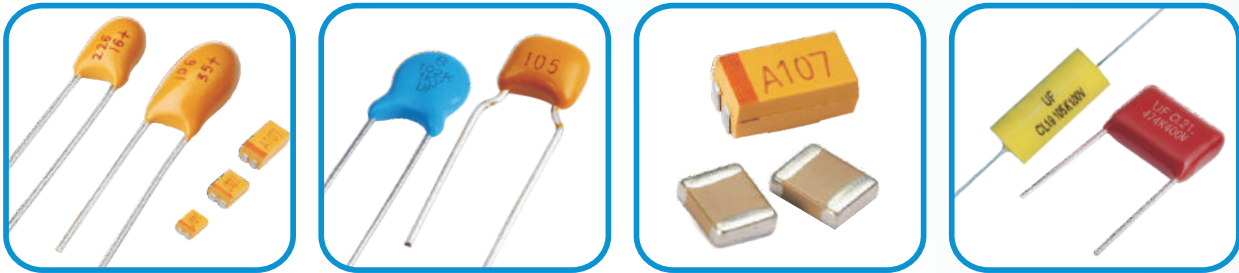
CT81 High Voltage Ceramic Capacitor

Temperature:	-25°C~+85°C	
Tolerance:	±5%; ±10%; ±20%; +80-20%	
Capacitanite:	1pF -0.1uF	
Voltage Range:	500V, 1KV, 2KV, 3KV,4KV,5KV,6KV	
Package Type:	Bulk, Ammo Taped, T&R.	
Dielectric:	SL Y5P Y5U Y5V	
Cross Reference:	Murata DEH, DEA,DEB, DEC, TDK CK45 CC45, Vishay SS Series	
Certifications:	ISO 9001: 2015;RoHS ; REACH	

X1Y1 & X1Y2 SAFETY CAPACITORS
Safety Standard Certified Ceramic Capacitors

Operating Temperature:	-25°C TO +125°C	
Capacitance Range:	100pF to 10000pF	
Capacitance Tolerance:	±10%, ±20%, +80-20%	
Rated Vlotage:	X1Y1: X1 400VAC Y1 400VAC X1Y2 : X1 400VAC Y2 250VAC	
Safety Approvals:	ENEC, VDE, UL, KC/KTL, CQC	
Temperature Cofficient:	±10% for B Y5P, +30 to -80% for Y5V	
Safety Approvals:	ENEC, VDE, UL, KC/KTL, CQC	
Dielectric Strength:	1500 VAC for 60 seconds. (250VAC) 4000 VAC for 60 seconds. (400VAC)	
Safety Approvals:	ENEC, VDE, UL, KC/KTL, CQC	
Cross Reference:	Murata KX KY series, TDK CS45, Kemet C90 Series	
Certifications:	ISO 9001: 2015; RoHS ; REACH Certification	

UF Capacitors



GJB9001C-2017 Military Parts Qualification
ISO 9001: 2015 & ISO 14001: 2015 Certified Factory

We are on-line! Please contact us by below.

Skype: topdiode

Wechat: +86 137 120 73035

Whatsapp : +86 137 120 73035

Linked in: Topdiode Manufacturing


Facebook: Topdiode




www.topdiode.com

Tantalum Electrolytic Capacitors & Aluminum Electrolytic Capacitors (SMD)

CA42 Radial Epoxy Dipped Tantalum Capacitor

Operating Temperature:	-55℃~+125℃; >85℃(with rated voltage derating)	
DC Leakage at 25℃:	$I_0 \leq 0.02 C_R U_R$ or 1 uA (Choose the greater one)	
Capacitanite Range:	0.1μF~1000μF	
Voltage Range:	6.3V, 10V, 16V, 25V, 35V, 50V	
Capacitance Tolerance:	K: ±10%; M: ±20% (Standard Tolerance)	
Pitch Size:	2.54mm & 5.08mm	
Package Type:	Bulk; Ammo Taped Package	
Cross Reference:	AVX TAP, Kemet T350-T390; Nemco TB Series	
Certifications:	Factory Military Certificate GJB9001C-2017; RoHS ; REACH Compliant; Metal Conflict Free	

CA45 Chip Tantalum Capacitors (General Purpose)

Operating Temperature:	-55℃~+125℃; >85℃(with rated voltage derating)	
DC Leakage at 25℃:	$I_0 \leq 0.02 C_R U_R$ or 1 uA (Choose the greater one)	
Capacitanite Range:	0.1μF~1000μF	
Voltage Range:	4V, 6.3V, 10V, 16V, 20V, 25V, 35V, 40V, 50V, 63V, 75V, 100V	
Capacitance Tolerance:	K: ±10%; M: ±20% (Standard Tolerance)	
Case Size:	A, B, C, D, E case (SMT)	
Package Type:	Tape & Reel	
SPQ/MPQ:	Reel Qty.: A B 2000pcs; C D 500pcs; E 400pcs	
Cross Reference:	AVX TAJ series, Kemet T491 Series, Vishay 293D	
Certifications:	Factory Military Certificate GJB9001C-2017; RoHS ; REACH Compliant; Metal Conflict Free	

Remark:CA45U Low ESR Chip Tantalum Capacitor available on request

TCS Series 85℃ 2000 Hours V-Chip Aluminum Electrolytic Capacitor (SMD E CAP)

TCS Series:	Standard, 85℃ V-chip aluminum electrolytic capacitors	
Temperature:	-40℃~ +85℃	
Load life:	2000 hrs.	
Voltage:	4V ~ 100V.DC	
Capacitance:	0.1μF~ 10000μF	
Tolerance:	±20% at 120Hz, 20℃	
Size:	4x5.4, 5x5.4, 6.3x5.4, 6.3x7.7, 8x6.2, 8x10.5, 10x10.5, 10x13.5,12.5x13.5	
Certifications:	ISO 9001: 2015; ISO 14001:2015; RoHS ; REACH ; Halogen Free Cert.	

TCK Series 105℃ 2000 Hours V-Chip Aluminum Electrolytic Capacitor (SMD E CAP)

TCK Series:	Standard, 105℃ V-chip aluminum electrolytic capacitors	
Temperature:	-40℃~ +105℃	
Load life:	2000 hrs. (1000 hrs. for Ø4~Ø6.3×5.4)	
Voltage:	4V ~ 100V.DC	
Capacitance:	0.1μF~ 10000μF	
Tolerance:	±20% at 120Hz, 20℃	
Size:	4x5.4, 5x5.4, 6.3x5.4, 6.3x7.7, 8x6.2, 8x10.5, 10x10.5, 10x13.5,12.5x13.5	
Certifications:	ISO 9001: 2015; ISO 14001:2015; RoHS ; REACH ; Halogen Free Cert.	

Remark: Low Impedance & Long Life SMD E Cap Series are available on request

Leaded Varistors (MOVs)

VAR Series Metal Oxide Varistor (MOVs)

Temperature:	-40℃~+85℃	
Design:	Leaded Disc, Round type	
Voltage:	18V~1800V	
Size:	05D, 07D, 10D, 14D, 20D	
Tolerance:	±10%	
Package Type:	Cut leg, Bulk, Ammo Taped,T&R.	
Certifications:	ISO 9001: 2015; ISO 14001:2015; RoHS ; REACH; VDE, UL, CQC safety approvals	


Remark: High Energy MOVs (Advanced Series) available on request

Plastic Film Capacitors

CL21 Metallized Polyester Capacitors

Temperature:	-40℃ ~ +85℃ (105℃ on Request)	
Rated Voltage:	100VDC, 250VDC, 400VDC, 630VDC, 1200V	
Capacitance:	0.01 ~ 10μF	
Tolerance:	±5% (on request), ±10% (Standard)	
Resistance:	$C \leq 0.33\mu F, I_R \geq 30000 M\Omega$ at 100VDC 60SEC $C > 0.33\mu F, I_R \geq 10000 S(M\Omega/\mu F)$ at 100VDC 60SEC	
Dissipation Factor:	≤0.01 (at 1 KHz)	
Certifications:	ISO 9001: 2015; ISO 14001:2015; RoHS ; REACH ;	

CL19 CL20 Axial Lead Met Polyester Film Capacitors
Axial MKT Capacitors

Shape:	CL19: CYCLOIDAL; CL20: Flat Oval Shape	
Temperature:	-40℃ ~ +105℃	
Rated Voltage:	100V, 250V, 400V, 630V.DC	
Capacitance:	0.01μF ~ 68μF	
Tolerance:	±5%, ±10%	
Withstand Volt.:	1.6U _R 2s (1.5U _R 5s)	
Certifications:	ISO 9001: 2015; ISO 14001:2015; RoHS ; REACH ;	

CBB81 High Voltage Met. Polypropylene Capacitor

Temperature:	-40℃~+85℃(105℃ on Request)	
Rated Voltage:	1000VDC, 1250VDC, 1600VDC, 2000VDC	
Capacitance:	0.001μF ~ 0.15μF	
Tolerance:	±5%; ±10%	
Dissipation:	≤0.1% (at 20℃, 1KHz)	
Package Type:	Bulk, Ammo Taped	
Certifications:	ISO 9001: 2015; ISO 14001:2015; RoHS ; REACH ;	

CL 23 Box Type Metallized Polyester Film Capacitors

Standard:	IEC384-2 GB/T7332-96	
Climatic Category:	55/105/56	
Rated Temperature:	85℃	
Operating Temp.:	55℃~105℃ (+85℃ to +105℃; decreasing factor 1.25% per °C for UR	
Rate Voltage:	50/63/100V 250V 400V 630V	
Capacitance:	0.001uF ~1.5uF	
Tolerance:	±5%(J)、 ±10%(K)	
Voltage Proof:	1.6UR (5s)	
Dissipation Factor:	≤0.8% (20℃、 1KHz)	
Insulation Res.:	≥3000MΩ (20℃、 1min) C ≤. 33UF IR* C ≥1000M Ω *UF	
Certifications:	ISO 9001: 2015; ISO 14001:2015; RoHS; REACH	

CBB21 Metallized Polypropylene Capacitor

Temperature:	-40℃~+85℃	
Rated Voltage:	100VDC, 250VDC, 400VDC, 630VDC	
Capacitance:	0.01μF~10μF	
Tolerance:	±5%; ±10%	
Dissipation:	≤0.002 (at 1KHz) (typical 0.001 max)	
Package Type:	Bulk, Ammo Taped	
Certifications:	ISO 9001: 2015; ISO 14001:2015; RoHS ; REACH ;	


CBB19 CBB20 Axial Lead Met Polypropylene Capacitors
Axial MKP Capacitors

Shape:	CBB19: CYCLOIDAL; CBB20: Flat Oval Shape	
Temperature:	-55℃ ~ +100℃	
Rated Voltage:	250V, 400V, 630V, 1000V, 1250V.DC	
Capacitance:	0.022uF ~ 56uF	
Tolerance:	±5%, ±10%	
Withstand Volt.:	1.7U _R 2s (1.5U _R 5s)	
Certifications:	ISO 9001: 2015; ISO 14001:2015; RoHS ; Reach ;	

CBB60 Motor Start Capacitor
AC Metalized Polypropylene Capacitors

Temperature:	-40℃~+85℃	
Capacitance:	1μF ~ 100μF	
Tolerance:	±5%; ±10%	
Rated Voltage:	250VAC 450V AC	
Dissipation:	≤0.004 1KHz	
Insulation Res.:	≥3000 S	
Package Type:	Bulk	
Certifications:	ISO 9001:2015VDE, UL, CQC, RoHS	

X2 Metallized Polypropylene Flim Capacitor

Temperature:	-40℃~+110℃	
Voltage Rating:	275VAC; 305VAC; 310VAC X2	
Capacitance:	0.001uF ~2.2uF	
Tolerance:	±10% standard	
Package:	Bulk, Ammo Tape Package	
Insulation Res.:	CR≤0. 33uF, I. R≥15, 000M Ω CR>0. 33uF, I. R≥6, 000S (M Ω /uF)	
Dissipation Factor:	tgδ≤0.0010 1KHZ	
Testing Voltage:	4.3UR DC /5s	
Approvals:	ENEC, UL, CQC, KC/KTL	
Certifications:	ISO 9001: 2015; ISO 14001:2015; RoHS; REACH	